


Feature:

1. Made of UV resistant ABS material
2. Can be mounted vertically or horizontally
3. Use circuit breaker, 15 Amp maximum per circuit
4. 30 backlit labels included
5. Label backlit: Red=On Green=Off Dark=Fuse Blown
6. Operating Voltage: multivolt 8-30 volts DC

10156

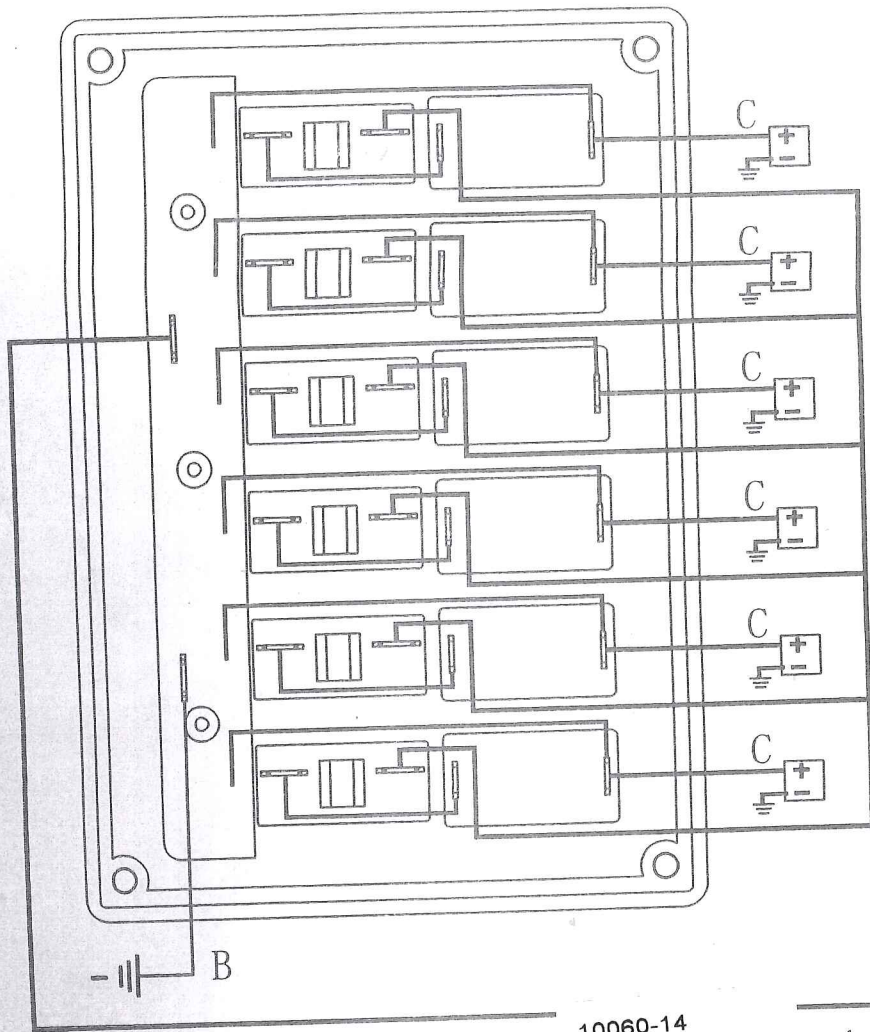

Instruction:

1. Connect DC positive to A
 2. Connect DC negative to B.
 3. Connect device DC positive to C.
- Connect device DC negative to grounding system.

10060-14

Bryterpanel gummiert 6 bryter



7 070893 264486

