

Stryker ST Series - LED

37146 Old Hwy 17 - Culbertson, NE 69024 | 800.557.0098 | golight.com



PERMANENT MOUNT MODELS

Wireless Hand-Held Remote

30004ST (white)

30064ST (chrome)

30514ST (black)

PORTABLE MODELS

Magnetic Base

Wireless Hand-Held Remote


30005ST (white)

30065ST (chrome)

30515ST (black)



LED Light Beam Dimensions

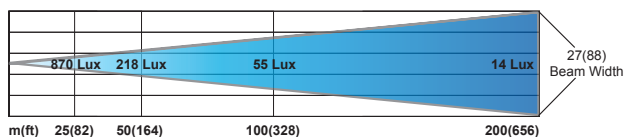


Illuminance (Lux) 870 218 55 14

Peak Beam Intensity: 544,000 Candela

Maximum Beam Distance: 1,475 m / 4,839 ft

Beam Angle: 8°

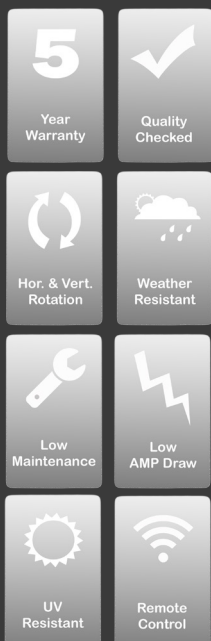

Housing:	ASA Luran heat resistant
	High impact, UV resistant material
Gears & Transmission Parts:	Lexan and Brass
Fasteners:	Stainless Steel
Motors:	Automotive grade 12V D.C. High Torque, R.P.M. 6087
	Constant Torque 17.133 mN.m/amp, Stall:12.31 mN.m Draw point 4 amps
	Output: 1.96 watts w/built in stall protection circuitry
	Built in stall protection circuitry
Type and Quality of LED's:	10 High Flux LED's
	P-Vex lens technology
	8° beam angle
	Anodized Aluminum heat sink w/liquid powder-cast finish
Peak Beam Intensity:	544,000 Candela
Max Beam Distance:	4,839 ft.
Voltage DC:	12V
Power Consumption:	40W
Max Current draw:	3.7 amps
Wireless Remote Controls:	Radio Frequency: 2.4 GHz
	Code match pairing process
	Batteries: 2 AAA
Warranty:	5 Year Limited Warranty
Mounting Options:	Permanent Mount
	or Portable Magnetic Base