

SYRINGE # HA5403

Set fluid level, SeaStar Helms

New Installation

- After completing the purging process as outlined in your owners manual and ensuring all air has been removed from steering system it will be necessary to set the proper oil level. If the helm pump is too full, expansion will cause oil to weep from the vent cap.
- Insert syringe into filler port and draw off enough steering fluid to fill the syringe up to the MAX FILL line on the SeaStar decal.

Existing Installation

- Ensure there is no air trapped in the system. Refer to owners manual for proper bleeding instructions.
- Top up the steering fluid.
- Set the proper oil level. If the helm pump is too full, expansion will cause oil to weep from the vent cap.
- Insert syringe into filler port and draw off enough steering fluid to fill the syringe up to the MAX FILL line on the SeaStar decal.

NOTICE

Disposing of excess fluid. If the original oil bottle is unavailable, dispose of the steering fluid in an environmentally conscientious manner, adhering to local and federal environmental regulations. Always wear safety glasses and protective clothing when working around hydraulic fluid and components.

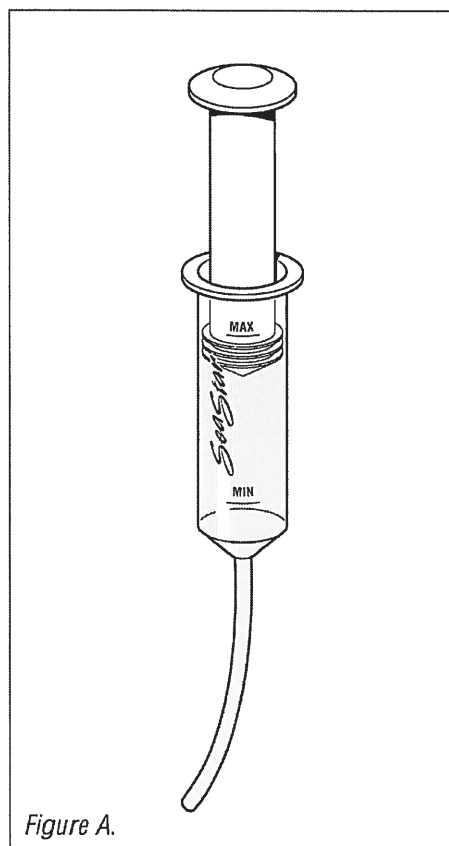


Figure B. Standard Mount.




Figure C. Traditional Tilt.




Figure D. Rear Mount.

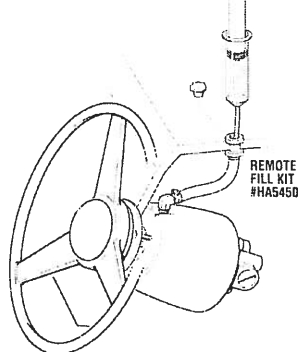


Figure E. Sport Tilt.

